



**ASM 192 T, 40 m<sup>3</sup>/h, remote control in mbar l/s, English language, 110/130 V and US power cable**




Similar Image

## ASM 192 T, 40 m<sup>3</sup>/h, remote control in mbar l/s, English language, 110/130 V and US power cable

- Powerful rotary vane pumps offering 40 m<sup>3</sup>/h backing capacity
- 4.4 l/s helium pumping speed
- 110/130 V operating voltage
- US power cable
- Voice synthesizer in English
- Remote control in mbar l/s

### Dimensions

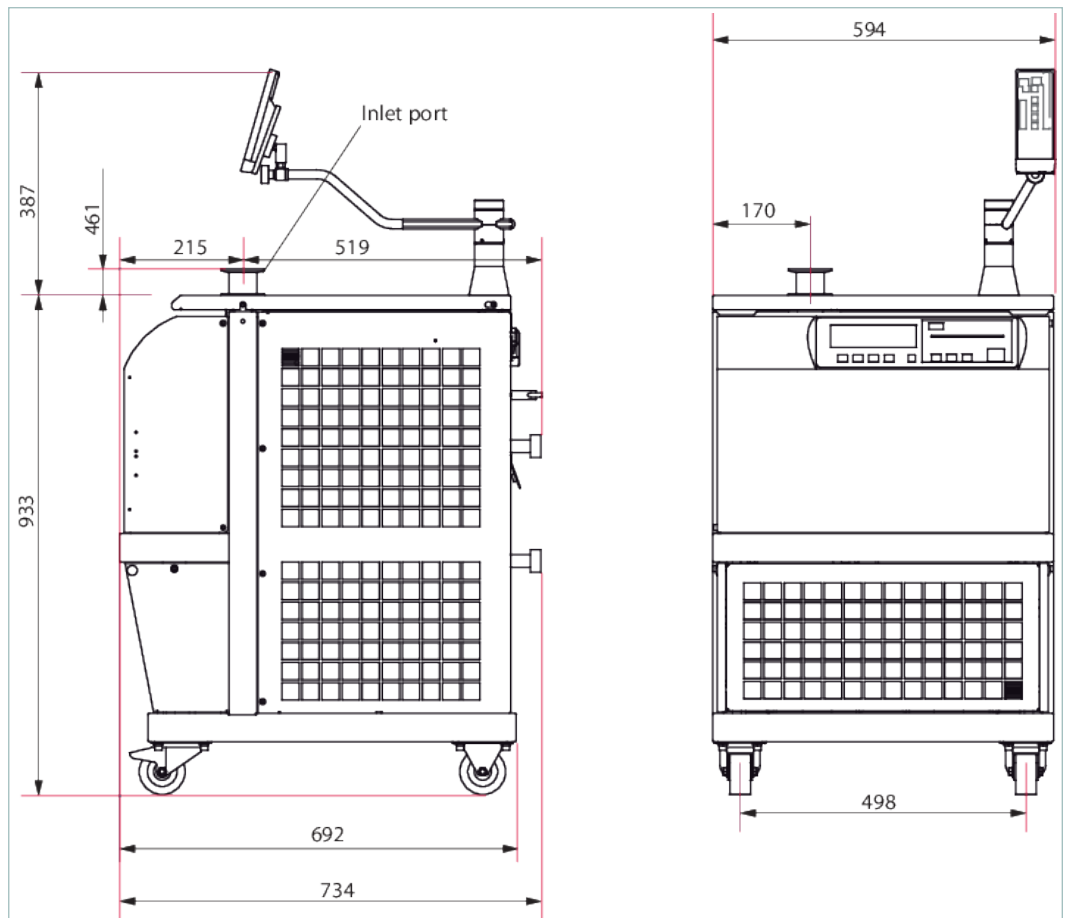

Technical Data	ASM 192 T, 40 m <sup>3</sup> /h, remote control in mbar l/s, English language, 110/130 V and US power cable
Backing pump	with oil sealed backing pump
Backing pump capacity	40 m <sup>3</sup> /h
Detectable gases	<sup>4</sup> He
Dimensions (L x W x H)	594 x 692 x 933 mm   23.39 x 27.24 x 36.73 inch
Flange (in)	DN 40 ISO-KF
I/O interfaces	Digital inputs (Start, Vent, Calibration...); Digital outputs (Test modes, cycle in progress, helium signal above reject set point...); Analog outputs (Helium signal log, Inlet pressure)
Interfaces	RS-232

<b>Technical Data</b>		<b>ASM 192 T, 40 m<sup>3</sup>/h, remote control in mbar l/s, English language, 110/130 V and US power cable</b>
Language		English
Mains cable		US power cable
Max. inlet test pressure		6 hPa
Minimum detectable leak rate for helium (sniffing leak detection)		1 · 10 <sup>-8</sup> Pa m <sup>3</sup> /s
Minimum detectable leak rate for helium (vacuum leak detection)		5 · 10 <sup>-13</sup> Pa m <sup>3</sup> /s
Noise level		54 dB(A)
Operating temperature		10 - 40 °C
Pumping speed for He		4.4 l/s
Start-up time (20°C) with calibration		4.5 min
Start-up time (20°C) without calibration		3 min
Supply		110-130 V, 50/60 Hz
Test method		Vacuum and sniffing leak detection
Type		High Performance - Console
User interface		Graphic color touch screen
Weight		155 kg   341.71 lb

<b>Order number</b>	
ASM 192 T, 40 m <sup>3</sup> /h	<b>D40R0R0MB710</b>

<b>Accessories</b>	
<b>Inlet filters</b>	
Inlet filter, 20 µm, DN 40/40 ISO-KF	<b>105842</b>
<b>Helium spray gun</b>	
Helium spray gun "Elite-Kit", spray gun with additional accessories in a compact case	<b>109951</b>
Helium spray gun, standard	<b>112535</b>
<b>Sniffer probe</b>	
Sniffer probe, 5 m hose length, rigid 9 cm nozzle	<b>SNC1E1T1</b>
Sniffer probe, 5 m hose length, flexible 15 cm nozzle	<b>SNC1E3T1</b>

## **VACUUM SOLUTIONS FROM A SINGLE SOURCE**

Pfeiffer Vacuum stands for innovative and custom vacuum solutions worldwide, technological perfection, competent advice and reliable service.

## **COMPLETE RANGE OF PRODUCTS**

From a single component to complex systems:

We are the only supplier of vacuum technology that provides a complete product portfolio.

## **COMPETENCE IN THEORY AND PRACTICE**

Benefit from our know-how and our portfolio of training opportunities!

We support you with your plant layout and provide first-class on-site service worldwide.

Are you looking for a  
perfect vacuum solution?  
Please contact us:

**Pfeiffer Vacuum GmbH**  
Headquarters · Germany  
T +49 6441 802-0  
info@pfeiffer-vacuum.de

[www.pfeiffer-vacuum.com](http://www.pfeiffer-vacuum.com)

All data subject to change without prior notice.

**PFEIFFER**  **VACUUM**