



# ASM 192 T2D+, 25 m3/h, remote control in mbar I/s, English language, 110/130 V and US power cable (15 A)






Similar Image

# ASM 192 T2D+, 25 m<sup>3</sup>/h, remote control in mbar l/s, English language, 110/130 V and US power cable (15 A)

- Frictionless ACP dry pump with 25 m³/h backing capacity
- 20 l/s helium pumping speed
- 110/130 V operating voltage
- US power cable (15 A)
- Voice synthesizer in English
- Remote control in mbar l/s

### **Dimensions**

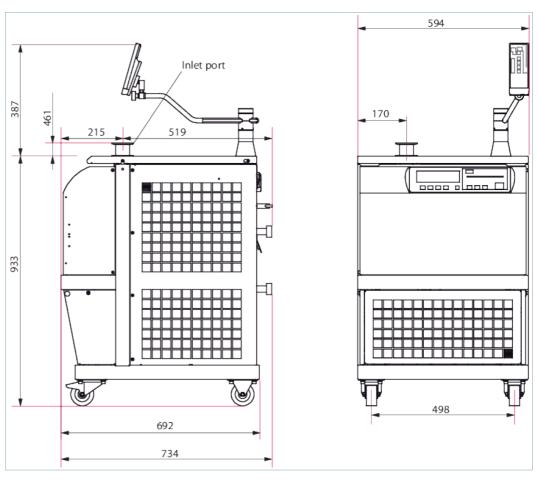

Technical Data	ASM 192 T2D+, 25 m <sup>3</sup> /h, remote control in mbar l/s, English language, 110/130 V and US power cable (15 A)
Backing pump	with oil free backing pump
Backing pump capacity	25 m³/h
Dimensions (L x W x H)	594 x 692 x 933 mm   23.39 x 27.24 x 36.73 inch
Flange (in)	DN 50 ISO-KF
I/O interfaces	Digital inputs (Start, Vent, Calibration); Digital outputs (Test modes, cycle in progress, helium signal above reject set point); Analog outputs (Helium signal log, Inlet pressure)
Interfaces	RS-232
Language	English

Technical Data	ASM 192 T2D+, 25 m <sup>3</sup> /h, remote control in mbar I/s, English language, 110/130 V and US power cable (15 A)
Mains cable	Yes, US power cable (15)
Max. inlet test pressure	30 hPa
Noise level	66 dB(A)
Operating temperature	10 - 40 °C
Pumping speed for He	20 l/s
Start-up time (20°C) with calibration	5 min
Start-up time (20°C) without calibration	3.5 min
Supply	110-130 V, 50/60 Hz
Test method	Vacuum and sniffing leak detection
User interface	Graphic color touch screen
Weight	157 kg   346.12 lb

Order number	
ASM 192 T2D+, 25 m <sup>3</sup> /h	D30R0S0MB710

Accessories	
Helium spray gun	
Helium spray gun "Elite-Kit", spray gun with additional accessories in a compact case	109951
Helium spray gun, standard	112535
Sniffer probe	
Sniffer probe, 5 m hose length, rigid 9 cm nozzle	SNC1E1T1
Sniffer probe, 5 m hose length, flexible 15 cm nozzle	SNC1E3T1
Remote control	
Remote control RC 10, wired/wireless, for ASM and ASI leak detectors	124193

### **VACUUM SOLUTIONS FROM A SINGLE SOURCE**

Pfeiffer Vacuum stands for innovative and custom vacuum solutions worldwide, technological perfection, competent advice and reliable service.

### **COMPLETE RANGE OF PRODUCTS**

From a single component to complex systems: We are the only supplier of vacuum technology that provides a complete product portfolio.

## **COMPETENCE IN THEORY AND PRACTICE**

Benefit from our know-how and our portfolio of training opportunities! We support you with your plant layout and provide first-class on-site service worldwide.

Are you looking for a perfect vacuum solution? Please contact us:

Pfeiffer Vacuum GmbH Headquarters · Germany T +49 6441 802-0 info@pfeiffer-vacuum.de

www.pfeiffer-vacuum.com